




BONETTI®

Check Valves

Type	: BCV
Pressure Rating	: PN16 – PN25
Connections	: Flanged (TS ISO 7005-2, DIN EN 1092-2)
Maximum Operating Conditions	: Rating to DIN 2401
Applications	: Water, Hot water, Steam, Air, Gas, ect.

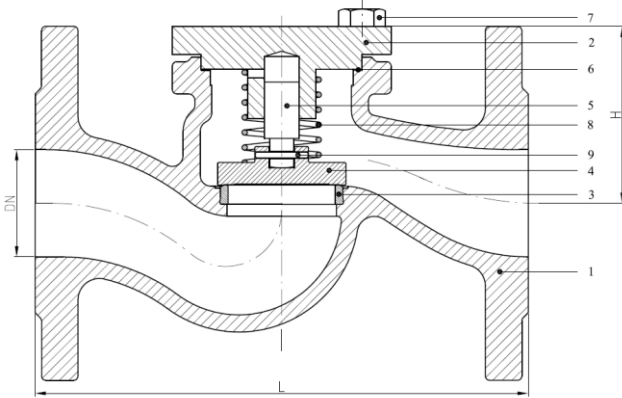

No	Material	
	PN16	PN25
1-Body	JL 1040 (GG-25)	JS 1049 (GGG40.3)
2-Bonnet	JL 1040 (GG-25)	JS 1049 (GGG40.3)
3-Seat	1.4021	1.4021
4-Disc^(*)	1.4021	1.4021
5-Stem	1.4021	1.4021
6-Gasket	Graphite	Graphite
7-Nut	8.8	
8-Spring	1.4310	1.4310
9-Pin	SS	SS

Çap	DN	15	20	25	32	40	50	65	80	100	125	150	200	250
Face to face	L	130	150	160	180	200	230	290	310	350	400	480	600	730
Height (mm)	H	61	61	68	68	79	84	111	118	137	179	200	250	340
Weght PN16	Kg	2,7	3,6	4,6	6,1	7,6	10,2	15,9	21,4	32,7	50	68	150	267
Weght PN25	Kg	3	3,7	4,7	6,2	8	10,4	15,9	21,6	34	52	70	152	269

Pressure-Temperaturere Table	Body Test Pressure (bar)		Operating Pressure (bar)					
	Material	Water	20 °C	120 °C	200 °C	250 °C	300 °C	350 °C
Nominal Pressure								
PN16	JL1040	24	16	16	13	11	10	-
PN25	JS1049	37,5	25	25	20	18	16	15

DİĞER ÖZELLİKLER

- ◆ Standard check valves have metal to metal sealing.
- ◆ (*)For low temperature (max. 200 C°) applications, check valves with soft seal disc can be provided .
- ◆ Dimensions are in mm. We reserve the right to carry out any necessary alterations, without notice .



VALFTEK® Valf Teknik Tesisat Elemanları Sanayi ve Ticaret A.Ş

Gn.Müdürlük & Fabrika : Bakırlı Mah. Suadiye Yolu No:19 41010 Sarımeşe Kartepe KOCAELİ Tel: 0 (262) 371 61 62 (Pbx) Fax: 0 (262) 371 61 72
email:valftek@valftek.com.tr

İstanbul Bölge: Şerifali mah. Kible Sk. 21/6 34775 Ümraniye İSTANBUL Tel:0 (216) 415 40 20 Fax:0 (216) 415 40 21

Ankara Bölge: Tel:0 (312) 311 50 61 Adana Bölge Tel:0 (322) 363 28 14 İzmir Bölge Tel:0 (232) 458 06 82

Bursa Bölge GSM:0 (533) 629 97 75 Trakya Bölge GSM:0 (533) 315 70 85

www.valftek.com.tr